

OVX-6400

6400VA DC/AC INVERTER

GENERAL FEATURES:

- Sine wave output voltage
- Suitable for motors control
- Adjustable output frequency
- Adjustable output voltage
- High input-output isolation 5200V_{RMS}
- Remote off opto-coupled
- Alarm by isolated relay contacts
- Configurable input: Reverse or Mid power
- Remote control via RS232
- CAN BUS
- Designed according to EN61287-1
- Input voltage according to:
 - EN50163:2006
 - EN50124-2:2017
- Fire and smoke: EN45545-2 pending



	Input voltage	Transient input overvoltage	Output voltage	Output power
OVX-6400-7701	400 ... 900 V _{DC}	None	400V three phase	6kW 6.4kVA 8kW _{PK}
OVX-6400-7701Z	400 ... 900 V _{DC}	2800V acc. EN50163	400V three phase	6kW 6.4kVA 8kW _{PK}

**INPUT**

Nominal DC input voltage	600 / 750V
Minimum DC input voltage	400V continuous
Maximum DC input voltage	900V continuous
Maximum Input overvoltage	Only for the model OVX-6400-7701Z: • EN50163:2006 (Supply voltage of traction systems) • 2800V according to EN50124-2=2017 4.2.2 and Annex A
Maximum input ripple	±5% V _{pp} from 300 to 360Hz
Inrush current	15A

OUTPUT

Output type	AC 3ph sine wave
Output Voltage	400V
Voltage tolerance	±5%
Output voltage range	20...100% of V _{OUT} (adjust via remote control)
Output frequency	50 / 60Hz via DIP-switch, 5...75Hz via RS-232
Maximum continuous current (I _{RMS})	9.24A
Maximum peak current 5s (I _{RMS})	11.5A
Continuous active / apparent power	6000W / 6400VA
Peak active / apparent power 5s	8000W / 8000VA
Load regulation	< 4.5%
Line regulation	< 2%
Output wave distortion THD	< 2% (average of 16 samples)
Output HF ripple	< 2.5%

ENVIRONMENTAL

Storage temperature	-25 ... 80°C
Operating ambient temperature:	
Full load	-25 ... 55°C, 70°C 10 min (SU3 class, according to EN61287-1)
62.5% load	-25 ... 70°C
Relative humidity without condensation	5 ... 95%
Maximum Altitude	2000m at full load
Cooling	Internal forced air controlled
Environmental regulations	RoHS & Reach according to directive 2011/65/EU

EMC

Immunity according	EN61000-6-2, EN50121-3-2
Emissions according	EN61000-6-4, EN50121-3-2

SAFETY

Safety according to	EN50124-1 Railway app. (Insulation coordination)
Dielectric strength: Input-Output	5200V _{RMS} 50Hz 1min.
Dielectric strength: Input-Earth	3400V _{RMS} 50Hz 1min.
Dielectric strength: Output-Earth	2300V _{RMS} 50Hz 1min.
Pollution degree	PD2
Overvoltage category	OV3
Fire and smoke	EN45545-2

RELIABILITY

MTBF	100.000h @40°C according to SN29500
Shock and Vibrations according to	EN61373:2011 Category 1 class B body mounted
Life cycle	20 years (fan maintenance after 10 years is required)



MECHANICAL

Dimensions (H x W x D mm)	87 x 430 x 450
Weight	< 12 kg
Protection degree	IP20


PROTECTIONS

Against reverse input voltage	Series diode at the input
Against input under-voltage	Under-voltage lock-out
Against input over-voltage	Over-voltage lock-out
Against input over-current	Input fuse
Against output overloads and short-circuits	Current and I ² T limited (see overload protection curve)
Against over-temperature	Shutdown with auto-recovery


CONTROL

Output OK LED	Green
Input OK LED	Green
Alarm LED	Red
Input alarm	Open when alarm. Maximum rating: 0.16A at 160V _{DC}
Output alarm	Open when alarm. Maximum rating: 0.16A at 160V _{DC}
Remote OFF input	Off applying 15...143 V _{DC} , Impedance >35kΩ
Configurable input (reverse or mid-power)	ON: applying 15...143 V _{DC} , Impedance >35kΩ

BLOCKS DIAGRAM

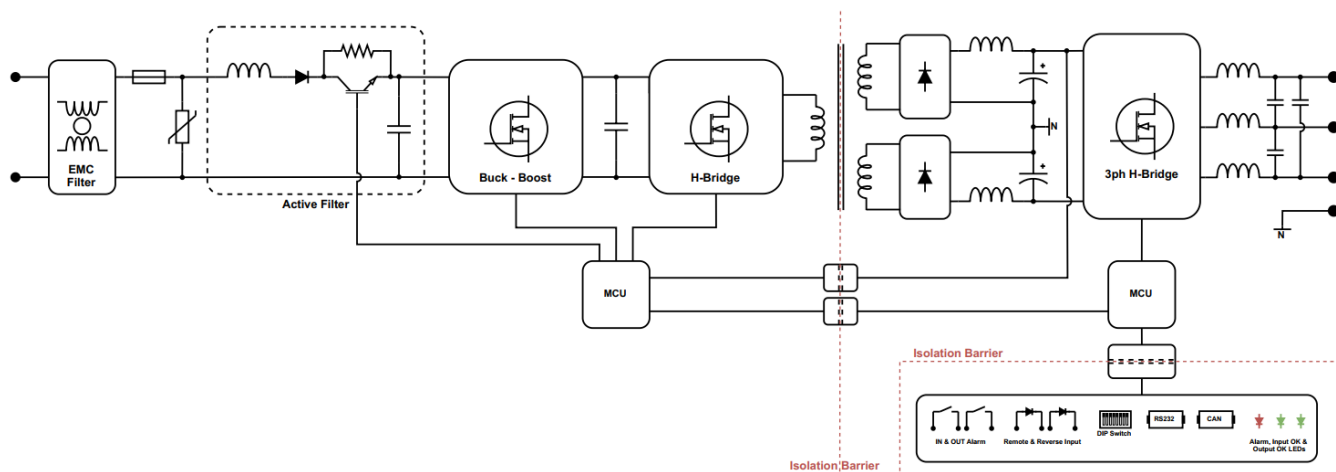

CONNECTIONS

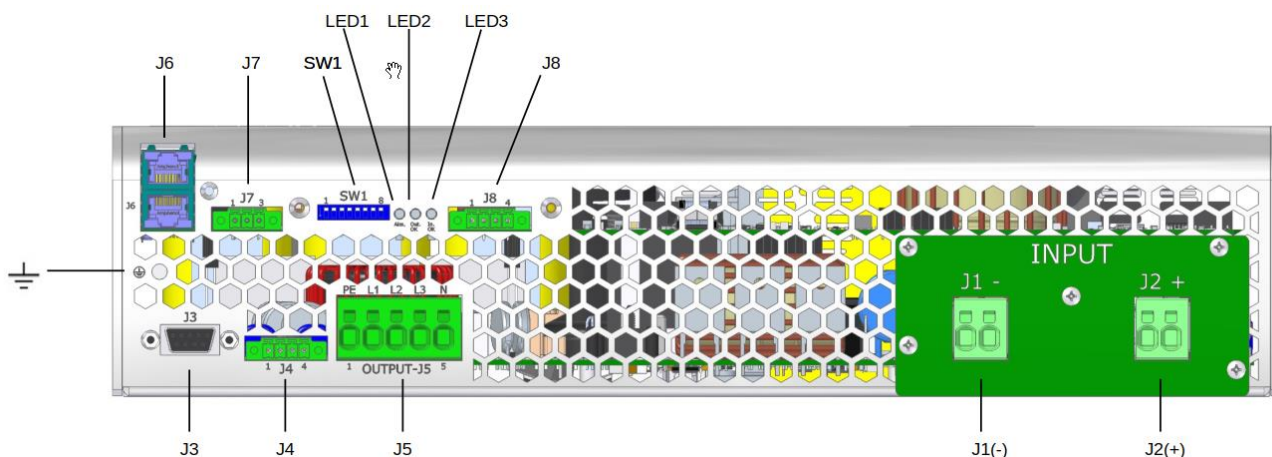

J1	-Vin	Spring clamp terminals cables 2.5 ... 4mm ²
J2	+Vin	
J5 - 1	Protective Earth	
J5 - 2	Output R	
J5 - 3	Output S	
J5 - 4	Output T	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J5 - 5	Output Neutral	
J4 - 1	+ Configurable input	
J4 - 2	- Configurable input	
J4 - 3	+ Remote	Phoenix Contact MC1.5/4-GF-3.81 Recommended female: Phoenix Contact MC1.5/4-STF-3.81
J4 - 4	- Remote	
J8 - 1	Status output	
J8 - 2	Status output	
J8 - 3	Status input	Phoenix Contact MC1.5/3-GF-3.81 Recommended female: Phoenix Contact MC1.5/3-STF-3.81
J8 - 4	Status input	
J7 - 1	CAN L (optional Can bus)	
J7 - 2	CAN H (optional Can bus)	Female D-Sub DB9
J7 - 3	GND CAN	
J3	RS-232	RJ45
J6A -J6B	Optional Parallel operation	

DESCRIPTION


The OVX-6400 is a three-phase sine-wave DC-AC inverter designed not only to work within 400 to 900V input voltage range but also to withstand surges and over-voltages as described in EN50124-2.

The unit allows:

- Changing the output frequency by means of DIP-switch-7 of SW1. OFF: 50Hz or default programmed, ON: 60Hz.
- Change local/remote (waiting RS-232 commands) by means of DIP-switch-6 of SW1. OFF: local, ON: remote.
- Shutdown applying voltage output 15 to 143V on pins 3 and 4 of J4.
- Start-up motors by means of a soft start. In the start-up, the output voltage rises linearly from 0V to set voltage and the frequency from the initial to the set one. The start-up ramp slope may be changed via RS-232.
- Set the rotation speed of a motor according to the appropriate Voltage/Frequency ratio.
- Configurable input (pin 1 and 2 of J4):
 - Reverse mode: Changing the rotation direction for the next start-up of a motor by applying voltage between 15 and 143V.
 - Mid power mode: Changing the output frequency in V/F mode from nominal to a mid-power frequency by applying voltage between 15 and 143V.
- Monitoring the status of the input and output voltage through the contacts of two separate solid state relays.
- Set and monitor parameters via RS232, CAN BUS.

The OVX-6400 is equipped with a maximum average power protection as well as maximum output peak current protection. This protects the semiconductors even when an output short-circuit occurs. It also features a disable function for input under-voltage, which allows protecting the batteries from harmful discharges.

POWER DERATING vs AMBIENT TEMP.

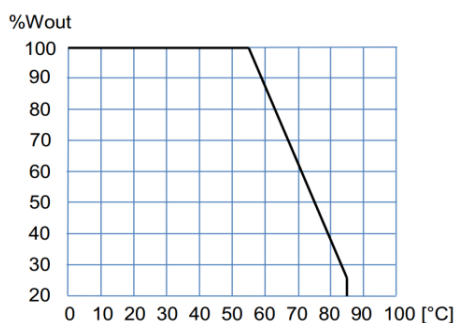

START-UP

- The unit has 6 threaded holes for the fixation on a mounting surface.
- The unit has internal fans. For an appropriate cooling, the air input and output should be free of elements that cause and an air flow reduction (minimum recommended distance to other objects 90mm).
- Make connections as shown in the figure.
- The default output frequency is 50Hz. For 60Hz simply actuate the dip-switch as indicated in the figure.

For safety reasons, the following requirements must be met:

- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Include an input fuse with a rating immediately higher than the maximum input current.




RS232 communication port

It is possible to control and monitor the unit via RS232 by means of a terminal emulator like "Tera Term" or "Putty". Also, it is possible to control and monitor the unit directly using the protocol showed in table:


Protocol configuration: ASCII code, 57600 bauds, parity none, 8 bits, 1bit stop.

Header	Function	Parameter	Returns	Explanation
P	R	V	PTV####	Input voltage in Volts
		v	PTv####	Input voltage ripple in Volts
		Y	PTYRN=#### [13]YSN=#### [13]YTN=####	Output voltage in Volts RMS Phase-Neutral ([13] = char 13 of ASCII code)
		I	PTIR=####[13]IS=#### [13]IT=####	Output current in Amps RMS ([13] = char 13 of ASCII code)
		T	PTT####	Internal temperature1 in K
		t	PTt####	Internal temperature 2 in K
		F	PTF####	Nominal output frequency in Hz
		f	PTf####	Actual output frequency in Hz
		y	PTy####	Actual output voltage set-point in V
		S	PTS####	Inverter state 999.9 → Enabled 000.0 → Disabled 222.2 → Blocked by overload 111.1 → Blocked by overload or shortcircuit
		M	PTM####	Model number
		R	PTR####	Firmware version
		Other	PTE	Command not supported
		1	####	OK / ERR
		2	####	OK / ERR
		3	####	OK / ERR
		4	####	OK / ERR
		5	####	OK / ERR
		6	####	OK / ERR
		7	####	OK / ERR
		8	####	OK / ERR
		L	####	OK / ERR
		O	####	OK / ERR
		P	####	OK / ERR
		Q	####	OK / ERR
		Y	####	OK / ERR
		X	####	OK / ERR
		1	####	OK / ERR
		2	####	OK / ERR
		3	####	OK / ERR
		4	####	OK / ERR


OTHER PORTS PENDING

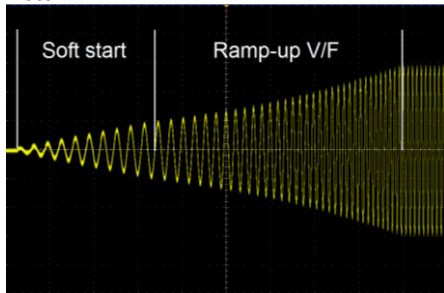**Note 1:**

Example for N=1: start-up time = N x 1.7s for changes from 16Hz to 50Hz

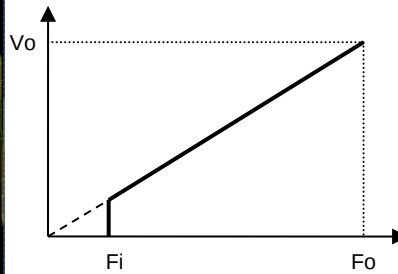

Mode V/F curve

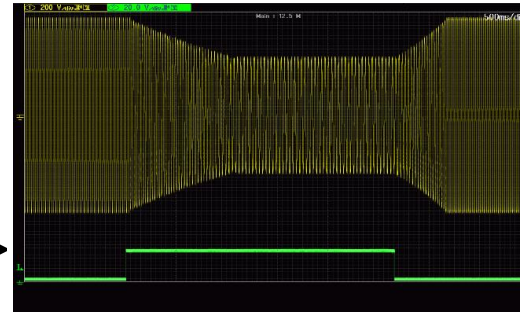Note 2 :

Example for change from 50Hz / 400V to 30Hz and 240V with ramp-down of 2 cycles /Hz and ramp-up de 1 Cycle/Hz. Yellow: output voltage and Green: Mid-Power input signal

WORKING PARAMETERS

Thermal protection		
Internal warning temperature (output alarm)	88	°C
Internal shutdown temperature	92	°C
Internal restart temperature	75	°C
Internal temperature of fan start-up	45	°C
Input voltage parameters		
	750V _{DC}	
High input voltage instantaneous shutdown	1300>	V _{DC}
High input voltage timed shutdown (t)	1270 - 1080	V _{DC}
Time to shutdown (t)	Controlled via temperature measurement	
Start-up voltage	390	V _{DC}
Low input voltage instantaneous shutdown	370	V _{DC}
Time to shutdown (t)	500m	s
Output voltage parameters		
Output voltage	400 (line to line)	V _{RMS}
Output under-voltage shutdown	< 85% of setting 1000ms	
Warning voltage (output alarm)	< 90% of setting 200ms	
Initial start-up frequency	5	Hz
Soft start duration	1 cycle	
Ramp-up V/F	1 Hz/cycle	
Output current parameters		
Maximum continuous output current	9.24	A
Warning current (output alarm)	8.8	A
Maximum overload I ² t	See figure below	
Time between restart attempts	4000	ms
Number of attempts of consecutive overload	5	
Working failures and reset		
Lock for continuous overload or internal failure	Unlimited time	
Reset time by input disconnection	> 2	min.


Configurable parameters underlined

OVERLOAD PROTECTION

Protection against overloads and short-circuits	By current limiting at I _{O,PK} By I²t . The unit shutdowns when the current-time is over the continuous operation curve	
Overload protection recovery	Every 4 seconds after shutdown, the unit tries to restart up to 5 times. If the overload persists, the unit reminds shutdown until an input reconnection .	




DIMENSIONS

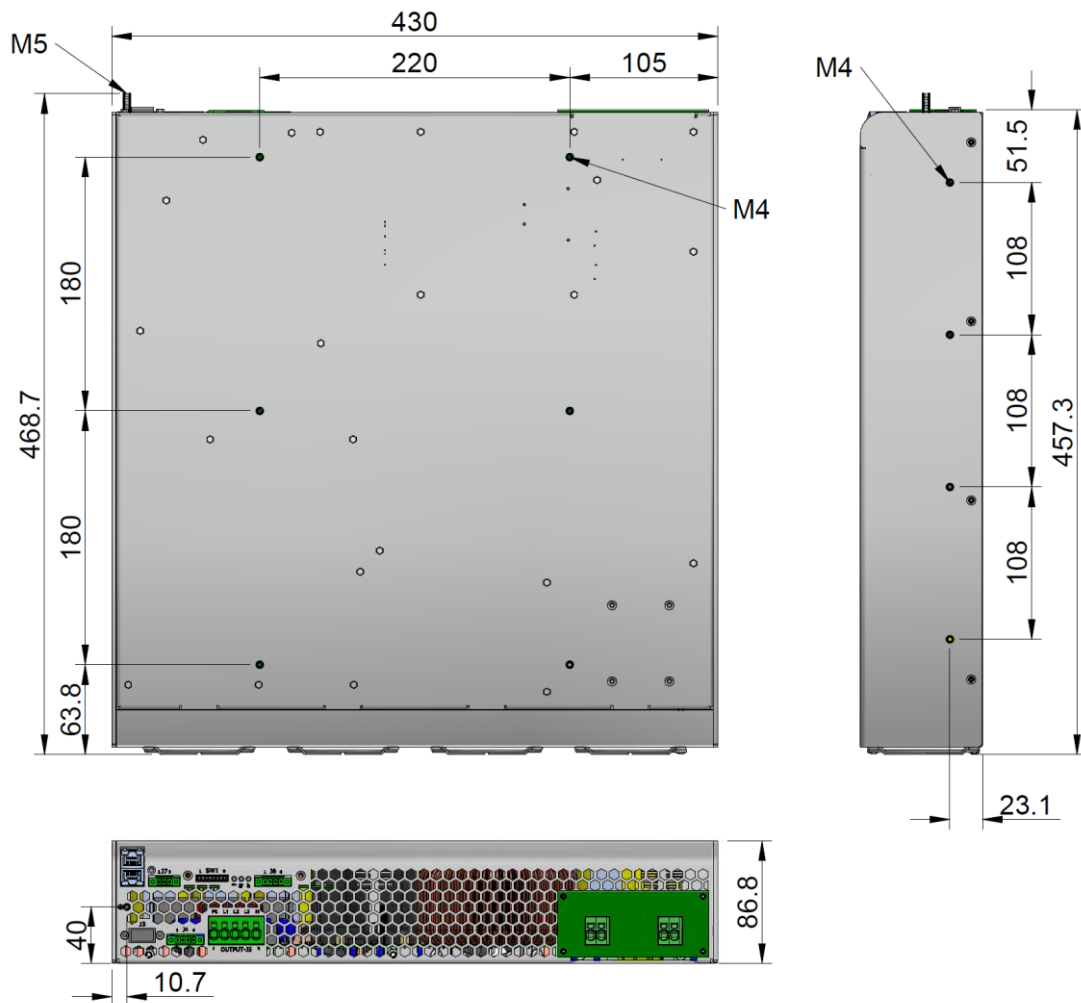



ACCESSORIES

Description	Notes	CODE
Mounting brackets kit	Contains two brackets and screws	9282

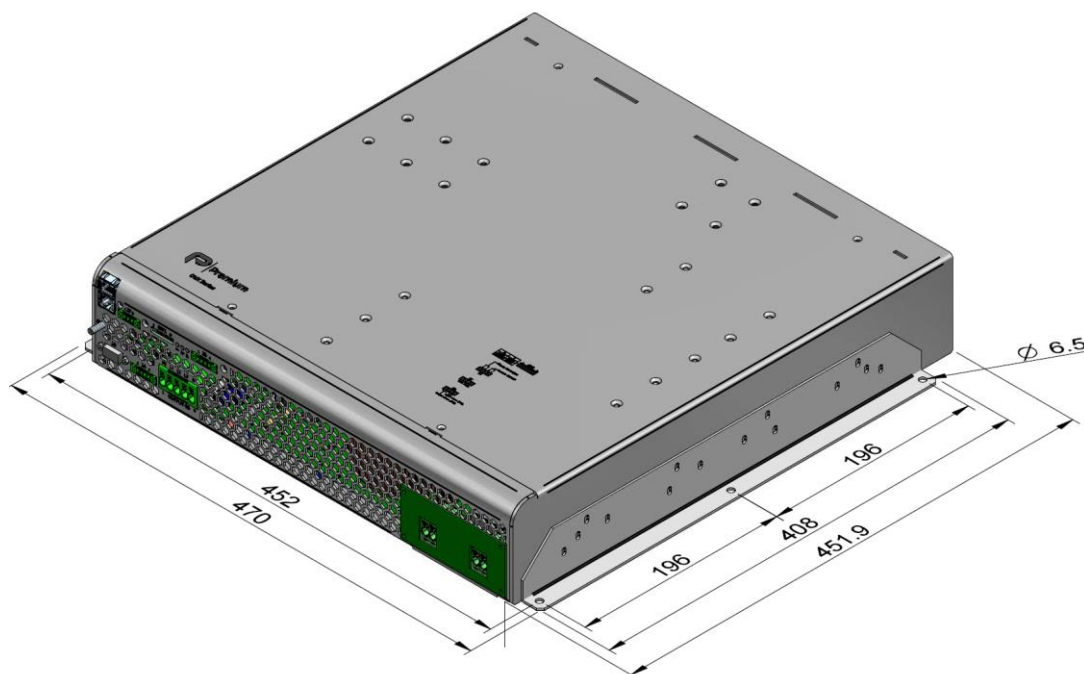

NP-9282



EU, UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,
Address: C/ Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the product:

Type: DC/AC converter
Model: **OVX-6400**

is in conformity with the provisions of the following directives or regulations:

2014/35/EU SI 2016 No 1101	Low voltage / The electrical equipment (safety) regulations
2014/30/EU SI 2016 No 1091	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU SI 2012 No. 3032	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

and that standards and/or technical specifications referenced below have been applied:

EN50124-1:2017	Railway app. (Insulation coordination)
EN 62368-1: 2014	Safety. Audio/video information and communication technology equipment
EN 61000-6-3: 2007	Generic emission standard
EN 61000-6-2: 2005	Generic immunity standard
IEC 61287-1: 2015	Railway applications. Power converters installed on board rolling stock
EN 50121-3-2: 2016	Railway applications. EMC Rolling stock equipment

* Optional, See annexe

CE marking year: **2024**; UKCA marking year: **2024**

Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instructions manual or datasheet.

L'Hospitalet de Llobregat, 10-02-2024

Albert Sole
Technical Director

PREMIUM S.A. is an ISO9001 and ISO14001 certified
company by **Bureau Veritas**

ANNEXE

Applicable values for the different sections of the norm 61287-1: 2015																																																																		
4.2.2	Working altitude	Up to 2000m																																																																
4.2.3	Ambient temperature	Class T3 inside vehicle compartment (-25 to 55°C full load) Class T3 Inside cubicle (55 to 70°C load <62.5%)																																																																
4.2.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																																
4.5.3.19	EMC Electromagnetic Compatibility EN50121-3-2:2016 IEC62236-3-2:2018																																																																	
		<table><tr><th>Test</th><th>Norm</th><th>Port</th><th>Frequency</th><th>Limits</th></tr><tr><td rowspan="4">Radiated emissions</td><td rowspan="4">IEC55016</td><td rowspan="4">Case</td><td>30MHz...230MHz</td><td>40dB(μV/m) Qpk at 10m</td></tr><tr><td>230MHz...1GHz</td><td>47dB(μV/m) Qpk at 10m</td></tr><tr><td>1...3GHz</td><td>Do not apply</td></tr><tr><td>3...6GHz</td><td>Internal freq. < 108MHz</td></tr><tr><td rowspan="2">Conducted emissions</td><td rowspan="2">IEC55016</td><td rowspan="2">Input</td><td>150kHz...500kHz</td><td>99dB(μV) Qpk</td></tr><tr><td>500kHz...30MHz</td><td>93dB(μV) Qpk</td></tr></table>	Test	Norm	Port	Frequency	Limits	Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(μV/m) Qpk at 10m	230MHz...1GHz	47dB(μV/m) Qpk at 10m	1...3GHz	Do not apply	3...6GHz	Internal freq. < 108MHz	Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(μV) Qpk	500kHz...30MHz	93dB(μV) Qpk																																									
		Test	Norm	Port	Frequency	Limits																																																												
		Radiated emissions	IEC55016	Case	30MHz...230MHz	40dB(μV/m) Qpk at 10m																																																												
					230MHz...1GHz	47dB(μV/m) Qpk at 10m																																																												
					1...3GHz	Do not apply																																																												
					3...6GHz	Internal freq. < 108MHz																																																												
		Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(μV) Qpk																																																												
					500kHz...30MHz	93dB(μV) Qpk																																																												
		<table><tr><th>Test</th><th>Norm</th><th>Port</th><th>Severity</th><th>Conditions</th><th>P</th></tr><tr><td rowspan="2">Electrostatic discharge</td><td rowspan="2">IEC61000-4-2</td><td rowspan="2">Case</td><td>±8kV</td><td>Air (isolated parts)</td><td rowspan="2">B</td></tr><tr><td>±8kV</td><td>Contact (conductive parts)</td></tr><tr><td rowspan="4">Radiated high frequency</td><td rowspan="4">IEC61000-4-3</td><td rowspan="4">X/Y/Z Axis</td><td>20V/m</td><td>0.08...1.0GHz M. 80% 1kHz</td><td rowspan="4">A</td></tr><tr><td>10V/m</td><td>1.4...2.1GHz M. 80% 1kHz</td></tr><tr><td>5V/m</td><td>2.1...2.5GHz M. 80% 1kHz</td></tr><tr><td>3V/m</td><td>5.1...6Ghz M. 80% 1kHz</td></tr><tr><td rowspan="4">Fast transients</td><td rowspan="4">IEC61000-4-4</td><td>Input</td><td>±2kV</td><td rowspan="4">Tr/Th: 5/50 ns</td><td rowspan="4">A</td></tr><tr><td>Output</td><td>±2kV</td></tr><tr><td>Signal</td><td>±2kV</td></tr><tr><td>PE</td><td>±1kV</td></tr><tr><td rowspan="2">Surge</td><td rowspan="2">IEC61000-4-5</td><td>Input L to L</td><td>±1kV</td><td rowspan="2">Tr/Th: 1.2/50μs</td><td rowspan="2">B</td></tr><tr><td>Input L to PE</td><td>±2kV</td></tr><tr><td rowspan="4">Conducted RF</td><td rowspan="4">IEC61000-4-6</td><td>Input</td><td>10V</td><td rowspan="4">0.15...80MHz M. 80% 1kHz</td><td rowspan="4">A</td></tr><tr><td>Output</td><td>10V</td></tr><tr><td>Signal</td><td>10V</td></tr><tr><td>PE</td><td>10V</td></tr><tr><td>Magnetic field</td><td>IEC61000-4-8</td><td>X/Y/Z Axis</td><td>300A/m</td><td>0Hz, 16.7Hz, 50/60Hz</td><td>A</td></tr></table>	Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B	±8kV	Contact (conductive parts)	Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6Ghz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A	Output	±2kV	Signal	±2kV	PE	±1kV	Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50μs	B	Input L to PE	±2kV	Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A	Output	10V	Signal	10V	PE	10V	Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A
		Test	Norm	Port	Severity	Conditions	P																																																											
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B																																																											
					±8kV	Contact (conductive parts)																																																												
		Radiated high frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																											
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																												
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																												
					3V/m	5.1...6Ghz M. 80% 1kHz																																																												
		Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A																																																											
				Output	±2kV																																																													
				Signal	±2kV																																																													
PE	±1kV																																																																	
Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50μs	B																																																													
		Input L to PE	±2kV																																																															
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A																																																													
		Output	10V																																																															
		Signal	10V																																																															
		PE	10V																																																															
Magnetic field	IEC61000-4-8	X/Y/Z Axis	300A/m	0Hz, 16.7Hz, 50/60Hz	A																																																													
P= Performance criteria, L= Line, PE= Protective Earth																																																																		
4.5.2.3	Tests list	1 Visual Inspection 2 Verification of size and tolerance 3 Weight 4 Marking inspection 5 Functional test on refrigeration system 6 Sealing test 7 Grade protection test 8 Dielectric strength test 9 Resistance to isolation test 10 Test for mechanical and electrical protection and for the measurement equipment 11 Low load test 12 Switching test 13 Measurement of acoustic noise 14 Heating test 15 Power loss test 16 Power overvoltage test and energy transients 17 Fast changes in load test 18 Inspection of safety requirements 19 Shock and vibration test 20 EMC test 21 Step in power line test 22 Interruption of voltage supply test 23 Current Sharing			Routine Type Type Routine Type N/A N/A Routine Type N/A Type Routine Routine Type Type Type Type Type Type Type Type Type Type Type																																																													

P= Performance criteria, L= Line, PE= Protective Earth

4.5.2.3	Tests list	1 Visual Inspection 2 Verification of size and tolerance 3 Weight 4 Marking inspection 5 Functional test on refrigeration system 6 Sealing test 7 Grade protection test 8 Dielectric strength test 9 Resistance to isolation test 10 Test for mechanical and electrical protection and for the measurement equipment 11 Low load test 12 Switching test 13 Measurement of acoustic noise 14 Heating test 15 Power loss test 16 Power overvoltage test and energy transients 17 Fast changes in load test 18 Inspection of safety requirements 19 Shock and vibration test 20 EMC test 21 Step in power line test 22 Interruption of voltage supply test 23 Current Sharing	Routine Type Type Routine Type N/A N/A Routine Type N/A Type Routine Routine Type Type Type Type Type Type Type Type Type Type
---------	------------	--	--

Authorised, valued-added distributor

Australia & New Zealand



Powerbox Australia Pty Ltd

Sydney Head Office
4 Beaumont Road,
Mt Kuring-Gai, NSW 2080
Australia



1800 251 380



sales@powerbox.com.au



powerbox.com.au

Powerbox Pacific Ltd

New Zealand Sales Office
1a Henry Rose Place,
Albany, Auckland
New Zealand 0632



09 4158 320



sales@powerbox.co.nz



powerbox.co.nz