

V·I Chip BCM Series

120-300 WATTS - DC/DC BUS CONVERTER MODULE

DC-DC PCB MOUNTED CONVERTERS & POWER MODULES

FEATURES


- Available in 48V input
- Fixed ratio bus converter
- Output power: Up to 300W
- Small footprint: 1.1in2 (7.1cm2)
- High density - up to 1,095 W/in3
- 125°C operation
- No output filtering required
- Pick & Place / SMD compatible



BUS CONVERTER MODULE (BCM) PRODUCT DESCRIPTION

The Bus Converter family consists of 14 models that provide an isolated intermediate bus voltage to power non-isolated POL converters. The 48 V BCMs operate from a narrow-input-range DC source and depending on the model selected, deliver a single output with ratings of 1.5 Vdc to 48 Vdc at up to 300 W. The 48 Vdc BCM family offers superior performance, the highest efficiency and power density in the smallest package available.

PART NUMBERING

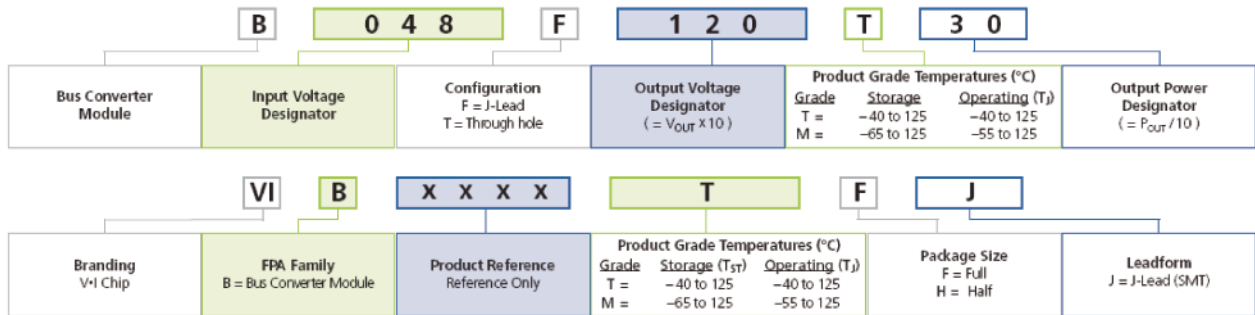

MODEL NUMBER	INPUT VOLTAGE (V)	OUTPUT VOLTAGE (V)	OUTPUT POWER (W)	OUTPUT CURRENT (A)	TEMP. GRADE	PACKAGE
B048F015T14	38 - 55	1.19 - 1.71	135	90	T	Full
B048F030T21	38 - 55	2.38 - 3.43	210	70	T	Full
B048F040T20	38 - 55	3.17 - 4.58	200	50	T	Full
B048F060T24	38 - 55	4.75 - 6.87	240	40	T	Full
B048F080T24	38 - 55	6.33 - 9.16	240	30	T	Full
B048F096T24	38 - 55	7.60 - 11.0	240	25	T	Full
B048F120T30	38 - 55	9.50 - 13.8	300	25	T	Full
B048F160T24	38 - 55	12.7 - 18.3	240	15	T	Full
B048F240T30	38 - 55	19.0 - 26.5	300	12	T	Full
B048F320T30	38 - 55	25.3 - 36.7	300	9	T	Full
B048F480T30	38 - 55	38.0 - 55.0	300	6	T	Full
BCM48BH120T120A00	38 - 55	9.5 - 13.75	120	11.3	T	Half

GENERAL SPECIFICATIONS

PARAMETER	VALUE		UNITS	NOTES
	FULL	HALF		
ISOLATION				
Voltage	2,250		V	Min.
Capacitance	3,000	1750	pF	
Resistance	10		MΩ	Min.
STANDARDS & APPROVALS				
	cTUVus			UL /CSA 60950,
	CE Mark			EN60950
	RoHS			Low Voltage Directive
THERMAL				
Operating junction temperature	-40 to 125		°C	T-Grade
	-55 to 125		°C	M-Grade
Storage temperature	-40 to 125		°C	T-Grade
	-65 to 125		°C	M-Grade

TYPICAL APPLICATION

