

# OCS-260

## 180...220W DC/AC SINE WAVE INVERTER

### GENERAL FEATURES:

Sine wave output voltage  
 Selectable output frequency: 50/60Hz  
 Adjustable output voltage  
 Output failure alarm  
 Remote inhibit  
 High input-output isolation 3000Vrms  
 Optional railway version EN50155  
 Fire and smoke: EN45545-2 approved



	12Vdc 9.5 ... 15V <sup>(1)</sup>	24Vdc 16.8 ... 30V	36Vdc 25.2 ... 45V	48Vdc 33.6 ... 60V	72Vdc 50.4 ... 90V	110Vdc 77 ... 138V
120Vac	<b>OCS-260-7041</b> 180W	<b>OCS-260-7043</b> 200W	<b>OCS-260-7044</b> 220W	<b>OCS-260-7045</b> 220W	<b>OCS-260-7046</b> 220W	<b>OCS-260-7047</b> 220W
230Vac	<b>OCS-260-7031</b> 180W	<b>OCS-260-7033</b> 200W	<b>OCS-260-7034</b> 220W	<b>OCS-260-7035</b> 220W	<b>OCS-260-7036</b> 220W	<b>OCS-260-7037</b> 220W

Note <sup>(1)</sup>: Startup voltage ≤10.2V. Under-voltage shutdown ≤ 9.1V

Several references are subjected to special MOQs and lead times. Please consult Premium's Sales Dept. and web site.





INPUT	
Input voltage range	See table
Maximum input ripple	5% Vin nom (Vrms, 100Hz)
OUTPUT	
Nominal output voltage (Vonom)	See table
Adjust range	± 5% of Vonom
Load regulation	4%
Line regulation	0.4% @ ΔVin -20...+25% 10% @ ΔVin -30...+25% 1% @ ΔVin -10...+25% for 12V input models 10% @ ΔVin -20...+25% for 12V input models
Output frequency	50 / 60Hz ± 0.25Hz
Output wave distortion THD	< 2% (16 samples average)
Output voltage HF ripple	< 20Vpp for 230Vac models < 10Vpp for 120Vac models
ENVIRONMENTAL	
Storage temperature	-40 ... 80°C
Operating temperature (full load)	-40 ... 55°C
Operating temperature (62.5% load)	-40 ... 70°C
Cooling	Natural convection
MTBF (MIL-HDBK-217-E; G <sub>b</sub> , 25°C)	250.000 h
EMC	
Immunity according	EN61000-6-2 EN50121-3-2
Emissions according	EN61000-6-4 EN50121-3-2
SAFETY	
Safety according to	EN60950-1, EN62368-1 Class I OV category II, Pollution degree 2 Input / output isolation: reinforced
Dielectric strength: Input / output	3000 Vrms / 50Hz / 1min (routine test 2s)
Dielectric strength: Output / ground	1500 Vrms / 50Hz / 1min (routine test 2s)
Dielectric strength: Input / ground	500 Vrms / 50Hz / 1min (routine test 2s)
Fire and smoke	EN45545-2
MECHANICAL	
Weight	900 g
Dimensions	100 x 220 x 40mm
PROTECTIONS	
Against input over-currents	Internal fuse
Against output overloads < Iompk	linear
Against output overloads > Iompk	Triggered
CONTROL	
Remote inhibit input	4 ... 24 Vdc
Output failure alarm	Solid state relay, open when alarm. Max: 60V, 0.3A

## ORDERING CODES

Model	Input Voltage DC [V]	Input voltage range [V]	Max. Input Current [A]	Output voltage AC [V]	Output current [A]	Active output power [W]	Appar. output power [VA]	Output Peak curr. 10ms [A]	Efficiency [%] *	No load input current [A] *
<b>OCS-260-7031</b>	12	9.50 - 15	22.1	230	0.78	180	260	4.0	86	0.65
<b>OCS-260-7033</b>	24	16.8 - 30	13.7	230	0.87	200	260	4.0	87	0.37
<b>OCS-260-7034</b>	36	25.0 - 45	10.0	230	0.96	220	260	4.0	88	0.21
<b>OCS-260-7035</b>	48	33.6 - 60	7.36	230	0.96	220	260	4.0	89	0.17
<b>OCS-260-7036</b>	72	50.4 - 90	4.91	230	0.96	220	260	4.0	89	0.12
<b>OCS-260-7037</b>	110	77 - 138	3.17	230	0.96	220	260	4.0	90	0.08
<b>OCS-260-7041</b>	12	9.50 - 15	22.3	120	1.50	180	260	7.6	85	0.65
<b>OCS-260-7043</b>	24	16,8 - 30	13.7	120	1.67	200	260	7.6	87	0.35
<b>OCS-260-7044</b>	36	25.0 - 45	10.0	120	1,83	220	260	7.6	88	0.21
<b>OCS-260-7045</b>	48	33.6 - 60	7.45	120	1,83	220	260	7.6	88	0.15
<b>OCS-260-7046</b>	72	50.4 - 90	4.97	120	1,83	220	260	7.6	88	0.12
<b>OCS-260-7047</b>	110	77 - 138	3.22	120	1,83	220	260	7.6	89	0.08


\* Typical values

Several references are subjected to special MOQs and lead times. Please consult Premium's Sales Dept. and web site.

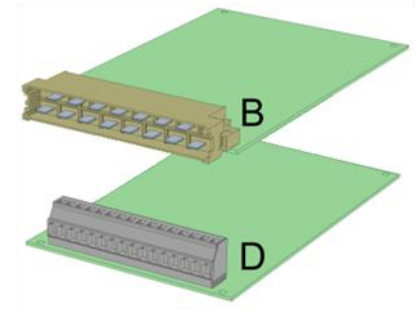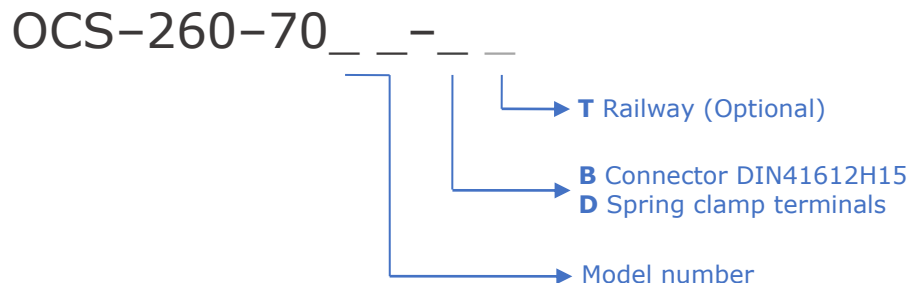


Accessories must be ordered in a separated order line

## BLOCKS DIAGRAM

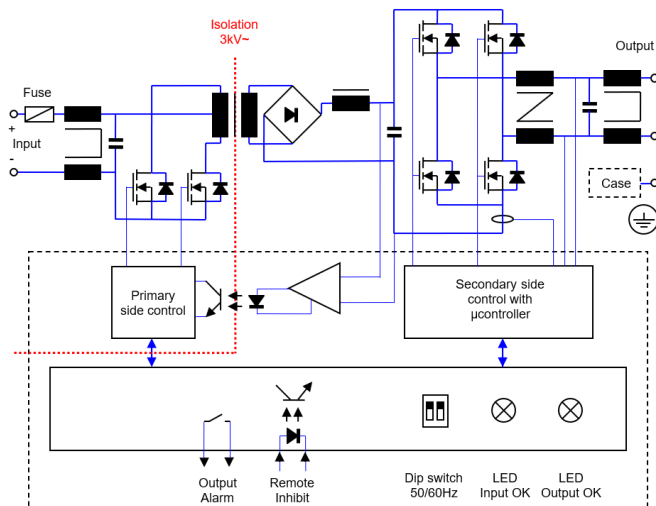


## CONNECTIONS

Connector DIN41612H15 (Max. 12A / terminal)




Spring clamp terminals (Max. 12A / terminal)

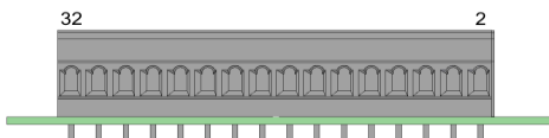

CONNECTION	Terminal
-Vin	2, 4, 6
+Vin	8, 10
-Inhibit	12
+Inhibit	14
-Alarm	16
+Alarm	18
N	22, 24
L	28, 30
PE	32

## POWER DERATING vs AMBIENT TEMP.

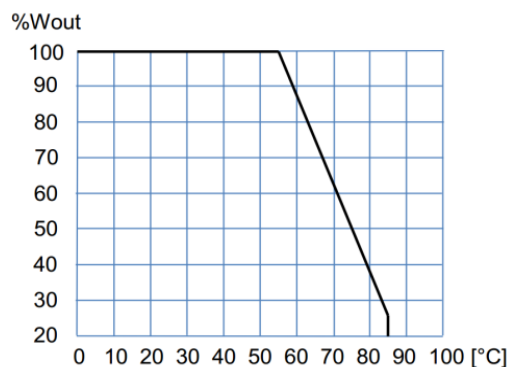

## DESCRIPTION



The OCS-260 consists of sine-wave 120Vac or 230Vac output voltage DC-AC converters. The frequency can be set to 50Hz or 60 Hz, and input and output are galvanically isolated.

The OCS-260 inverters consist of two cascaded converters, one DC-DC generating an intermediate output voltage from the input voltage. That intermediate voltage is inverted to supply the output voltage and frequency by means of a second DC/AC converter.

The input is protected against reverse polarity by means of fuse and against under-voltage by unit shutdown.

The output has protection of maximum average power and maximum peak current. The unit shutdowns when the operation curve limit is exceeded for more than one second. Every 2 seconds after shutdown, the unit tries to restart up to 3 times. If the overload persists, the unit remains shutdown until an input reconnection.

## OPERATION CURVE LIMITS

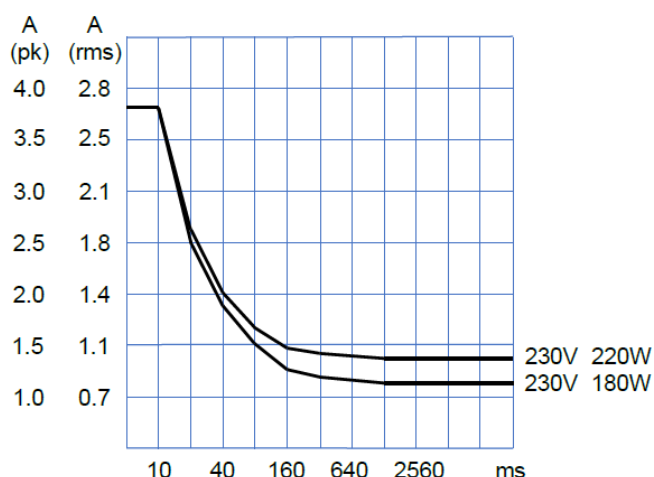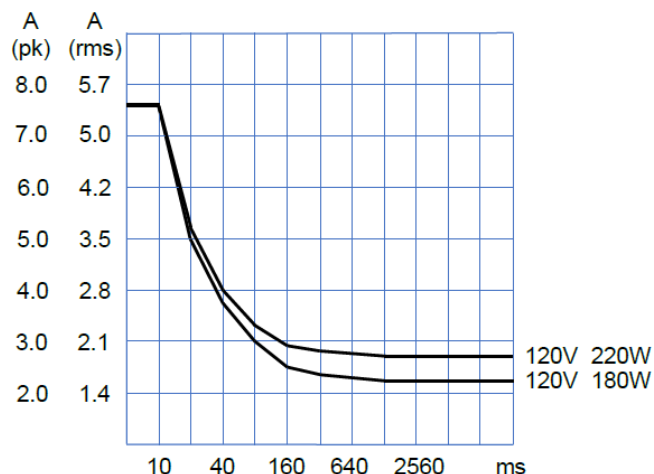



## RECOMMENDED WIRING

	Input 12V	Input 24V	Input 36V	Input 48V	Input 72V	Input 110V	Output 120Vca	Output 230Vca
Max. Current [A]	23	14	10	7.4	5.0	3.2	2.2	1.2
Cable Section [mm <sup>2</sup> ]	2.5	1.5	1.5	1	0.75	0.75	0.75	0.75

## INSTALLATION

There are two connecting options: spring clamp terminal strip and DIN-41612-H15 connector.

The product can be mounted in several ways:

- On a chassis by means of the 4 corner holes.
- In EUROCARD racks. For this application there is a standard 10Te front plate accessory **NP-9289**
- With the mounting base **NP-9125**. This accessory can be mounted on a chassis or in DIN rail adding the clip accessory **NP-9135**.

Make connections as shown in the CONNECTIONS table.

The default output frequency is 50Hz. For 60Hz simply actuate the dip-switch as indicated in the figure.


The inverter includes active overload protection but does not provide protection against prolonged reactive overload conditions. Therefore, the maximum power output (VA) should not be exceeded.

**For safety reasons, the following requirements must be met:**

- Provide the equipment with some kind of protective enclosure that complies with the electrical safety directives in effect within the country where the equipment is installed.
- Use cables of adequate cross-section to connect inputs and outputs. The following table lists the maximum currents and the minimum cross-sections for the cables used for each power connection.



## DIMENSIONS

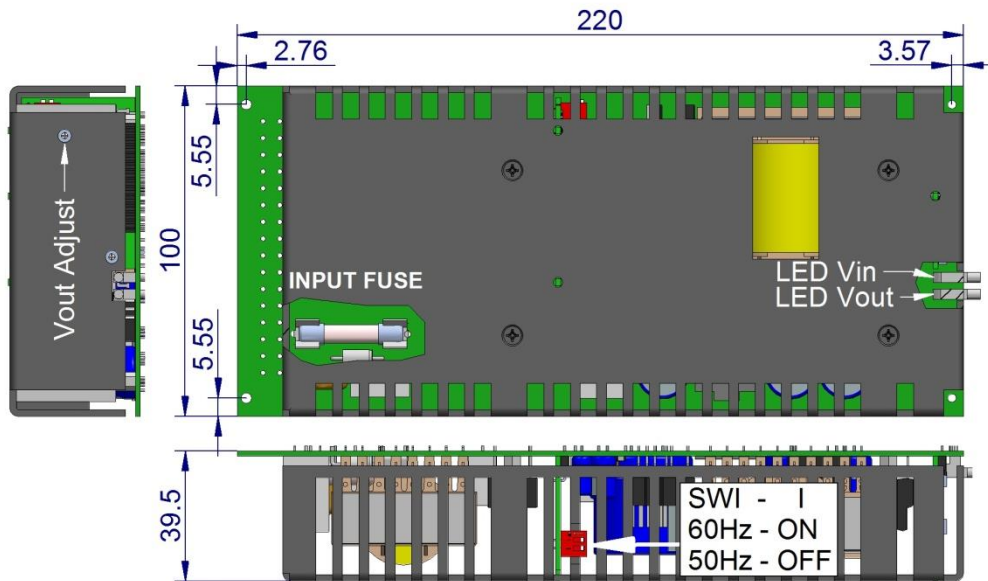


INPUT FUSE Size 6.3x32mm			
Models		Input	Rating
7031	7041	12V	T 30A
7033	7043	24V	T 15A
7034	7044	36V	T 12A
7035	7045	48V	T 8.0A
7036	7046	72V	T 6.3A
7037	7047	110V	T 4.0A

## ACCESSORIES

ACCESSORIES	NOTES	CODE
Mounting base	Screws included	<b>NP-9125</b>
DIN RAIL CLIP for mounting base	Screws included	<b>NP-9135</b>
Front plate 19" subrack (3U 10TE)	Screws and LED light guides included	<b>NP-9289</b>
FR4 PCB solder side cover protection	Screws included	<b>NP-9647</b>


**NP-9125**

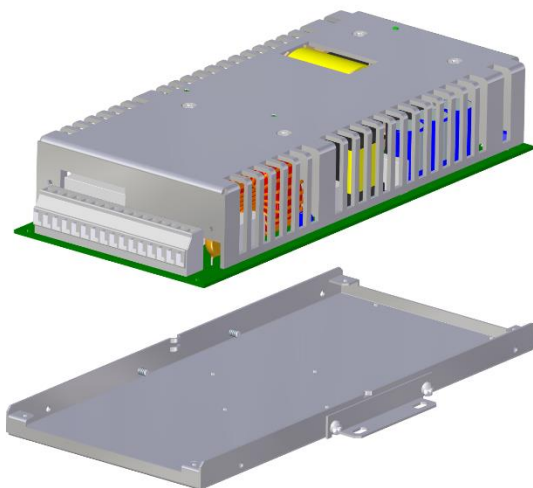

**NP-9135**



**NP-9647**

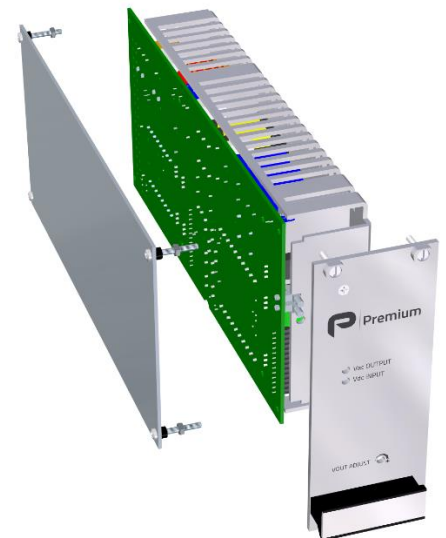

**NP-9289**



## CE EU DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,

Address: C/. Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the products:

Type: **DC/AC Inverter**

Brand: **Premium**

Models: **OCS-260-7041, OCS-260-7043, OCS-260-7044, OCS-260-7045, OCS-260-7046, OCS-260-7047, OCS-260-7031, OCS-260-7033, OCS-260-7034, OCS-260-7035, OCS-260-7036, OCS-260-7037**  
with any of the suffixes **B, T** or **D**

is in conformity with the provisions of the following EU directive(s):

2014/35/EU	Low voltage / The electrical equipment (safety) regulations
2014/30/EU	EMC / Electromagnetic compatibility regulations
2011/65/EU Annex II and its amendment 2015/863/EU	RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to aforementioned directives, was performed by Premium S.A. and is based on the following standards:

EN IEC62368-1:2020 A11:2020	Safety. Audio/video information and communication technology equipment
EN IEC61000-6-4:2019	Generic emission standard
EN IEC61000-6-2:2019	Generic Immunity standard
EN IEC63000:2018	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances
EN50155: 2021*	Railway applications. Electronic equipment used on rolling stock material
EN50121-3-2: 2019*	Railway applications. EMC Rolling stock equipment

\* Optional, see annexe

CE marking year: **2014**

### Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instruction manual or datasheet.

L'Hospitalet de Llobregat, 06-08-2024

Albert Sole  
Technical Director

**PREMIUM S.A.** is an ISO9001 and ISO14001  
certified company by **Bureau Veritas**



## UKCA DECLARATION OF CONFORMITY

The undersigned, representing the following:

Manufacturer: PREMIUM, S. A.,

Address: C/. Dolors Aleu 19-21, 08908 L'Hospitalet de Llobregat, SPAIN

herewith declares that the products:

Type: **DC/AC Inverter**

Brand: **Premium**

Models: **OCS-260-7041, OCS-260-7043, OCS-260-7044, OCS-260-7045, OCS-260-7046, OCS-260-7047, OCS-260-7031, OCS-260-7033, OCS-260-7034, OCS-260-7035, OCS-260-7036, OCS-260-7037**  
with any of the suffixes **B, T, or D**

Complies with the essential protection requirements of the following regulations:

SI 2016 No 1101 Low voltage / The electrical equipment (safety) regulations

SI 2016 No 1091 EMC / Electromagnetic compatibility regulations

SI 2012 No. 3032 RoHS / Restriction of the use of certain hazardous substances in electrical and electronic equipment

This declaration applies to all specimens manufactured identical to the samples submitted for testing/evaluation.

Assessment of compliance of the product with the requirements relating to aforementioned regulations, was performed by Premium S.A. and is based on the following standards:

EN IEC62368-1:2020 A11:2020 Safety. Audio/video information and communication technology equipment

EN IEC61000-6-4:2019 Generic emission standard

EN IEC61000-6-2:2019 Generic Immunity standard

EN IEC63000:2018 Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

EN50155: 2021\* Railway applications. Electronic equipment used on rolling stock material

EN50121-3-2: 2019\* Railway applications. EMC Rolling stock equipment

\* Optional, see annexe

UKCA marking year: **2021**

### Notes:

For the fulfilment of this declaration the product must be used only for the aim that has been conceived, considering the limitations established in the instruction manual or datasheet.

L'Hospitalet de Llobregat, 06-08-2024

Albert Sole  
Technical Director

**PREMIUM S.A.** is an ISO9001 and ISO14001  
certified company by **Bureau Veritas**





## ANNEXE

Applicable values for the different sections of the norm EN50155: 2021																																																																
4.4.1	Working altitude	Up to 1800m																																																														
4.4.2	Ambient temperature	Class OT1 (-25 to 55°C): load < 100% Class OT2 (-40 to 55°C): load < 100% Class OT3 (-25 to 70°C): load <50% Class OT4 (-40 to 70°C): load <50%																																																														
4.4.3	Switch-on extended operating temp.	ST1																																																														
4.4.4	Rapid temperature variations	H1																																																														
4.4.5	Shocks and vibrations	According EN61373:2010 Category 1 class B																																																														
4.4.6	EMC Electromagnetic Compatibility  EN50121-3-2:2019	<table><tr><th>Test</th><th>Norm</th><th>Port</th><th>Frequency</th><th>Limits</th></tr><tr><td rowspan="4">Radiated emissions</td><td rowspan="4"></td><td rowspan="4">Case</td><td>30MHz...230MHz</td><td>40dB(μV/m) Qpk at 10m</td></tr><tr><td>230MHz...1GHz</td><td>47dB(μV/m) Qpk at 10m</td></tr><tr><td>1...3GHz</td><td>Do not apply</td></tr><tr><td>3...6GHz</td><td>Internal freq. &lt; 108MHz</td></tr><tr><td rowspan="2">Conducted emissions</td><td rowspan="2">IEC55016</td><td rowspan="2">Input</td><td>150kHz...500kHz</td><td>99dB(μV) Qpk</td></tr><tr><td>500kHz...30MHz</td><td>93dB(μV) Qpk</td></tr></table>					Test	Norm	Port	Frequency	Limits	Radiated emissions		Case	30MHz...230MHz	40dB(μV/m) Qpk at 10m	230MHz...1GHz	47dB(μV/m) Qpk at 10m	1...3GHz	Do not apply	3...6GHz	Internal freq. < 108MHz	Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(μV) Qpk	500kHz...30MHz	93dB(μV) Qpk																																			
		Test	Norm	Port	Frequency	Limits																																																										
		Radiated emissions		Case	30MHz...230MHz	40dB(μV/m) Qpk at 10m																																																										
					230MHz...1GHz	47dB(μV/m) Qpk at 10m																																																										
					1...3GHz	Do not apply																																																										
					3...6GHz	Internal freq. < 108MHz																																																										
		Conducted emissions	IEC55016	Input	150kHz...500kHz	99dB(μV) Qpk																																																										
					500kHz...30MHz	93dB(μV) Qpk																																																										
		<table><tr><th>Test</th><th>Norm</th><th>Port</th><th>Severity</th><th>Conditions</th><th>P</th></tr><tr><td rowspan="2">Electrostatic discharge</td><td rowspan="2">IEC61000-4-2</td><td rowspan="2">Case</td><td>±8kV</td><td>Air (isolated parts)</td><td rowspan="2">B</td></tr><tr><td>±8kV</td><td>Contact (conductive parts)</td></tr><tr><td rowspan="4">Radiated high-frequency</td><td rowspan="4">IEC61000-4-3</td><td rowspan="4">X/Y/Z Axis</td><td>20V/m</td><td>0.08...1.0GHz M. 80% 1kHz</td><td rowspan="4">A</td></tr><tr><td>10V/m</td><td>1.4...2.1GHz M. 80% 1kHz</td></tr><tr><td>5V/m</td><td>2.1...2.5GHz M. 80% 1kHz</td></tr><tr><td>3V/m</td><td>5.1...6Ghz M. 80% 1kHz</td></tr><tr><td rowspan="4">Fast transients</td><td rowspan="4">IEC61000-4-4</td><td>Input</td><td>±2kV</td><td rowspan="4">Tr/Th: 5/50 ns</td><td rowspan="4">A</td></tr><tr><td>Output</td><td>±2kV</td></tr><tr><td>Signal</td><td>±2kV</td></tr><tr><td>PE</td><td>±1kV</td></tr><tr><td rowspan="2">Surge</td><td rowspan="2">IEC61000-4-5</td><td>Input L to L</td><td>±1kV</td><td rowspan="2">Tr/Th: 1.2/50μs</td><td rowspan="2">B</td></tr><tr><td>Input L to PE</td><td>±2kV</td></tr><tr><td rowspan="4">Conducted RF</td><td rowspan="4">IEC61000-4-6</td><td>Input</td><td>10V</td><td rowspan="4">0.15...80MHz M. 80% 1kHz</td><td rowspan="4">A</td></tr><tr><td>Output</td><td>10V</td></tr><tr><td>Signal</td><td>10V</td></tr><tr><td>PE</td><td>10V</td></tr></table>					Test	Norm	Port	Severity	Conditions	P	Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B	±8kV	Contact (conductive parts)	Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A	10V/m	1.4...2.1GHz M. 80% 1kHz	5V/m	2.1...2.5GHz M. 80% 1kHz	3V/m	5.1...6Ghz M. 80% 1kHz	Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A	Output	±2kV	Signal	±2kV	PE	±1kV	Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50μs	B	Input L to PE	±2kV	Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A	Output	10V	Signal	10V	PE	10V
		Test	Norm	Port	Severity	Conditions	P																																																									
		Electrostatic discharge	IEC61000-4-2	Case	±8kV	Air (isolated parts)	B																																																									
					±8kV	Contact (conductive parts)																																																										
		Radiated high-frequency	IEC61000-4-3	X/Y/Z Axis	20V/m	0.08...1.0GHz M. 80% 1kHz	A																																																									
					10V/m	1.4...2.1GHz M. 80% 1kHz																																																										
					5V/m	2.1...2.5GHz M. 80% 1kHz																																																										
					3V/m	5.1...6Ghz M. 80% 1kHz																																																										
		Fast transients	IEC61000-4-4	Input	±2kV	Tr/Th: 5/50 ns	A																																																									
				Output	±2kV																																																											
				Signal	±2kV																																																											
				PE	±1kV																																																											
		Surge	IEC61000-4-5	Input L to L	±1kV	Tr/Th: 1.2/50μs	B																																																									
				Input L to PE	±2kV																																																											
Conducted RF	IEC61000-4-6	Input	10V	0.15...80MHz M. 80% 1kHz	A																																																											
		Output	10V																																																													
		Signal	10V																																																													
		PE	10V																																																													
P= Performance criteria, L= Line, PE= Protective Earth																																																																
4.4.7	Relative humidity	Up to 95%																																																														
5.2.2	DC power supply range	From 0.70 to 1.25 Un continuous																																																														
5.2.3	Temporary DC power supply fluctuation	From 0.60 to 1.40 Un 0.1s From 1.25 to 1.40 Un 1s without damage																																																														
5.2.4	Interruptions of voltage supply	Class S1 (without interruptions)																																																														
5.2.5	Supply change-over	0,6 Un duration 100 ms (without interruptions). Performance criterion A																																																														
5.2.7	Input ripple factor	10% peak to peak with a DC Ripple Factor of 5 %																																																														
7.2.7	Input reverse polarity protection	By fuse																																																														
10.7	Protective coating for PCB assemblies	Class PC2																																																														
13.3	Tests list	1 Visual Inspection 2 Performance test 3 DC Power supply test 4 Low temperature test 5 Dry heat test 6 Low temperature storage test 7 Insulation test 8 Cyclic damp heat test 9 Electromagnetic compatibility test 10 Shock and vibration test 11 Enclosure protection test (IP code) 12 Stress screening test 13 Rapid Temperature variation test 14 Salt mist test			Routine Routine Type Type Type - Routine Type Type Type - Routine: 40C and load 100% - -																																																											

***Authorised, valued-added distributor***

Australia & New Zealand



**Powerbox Australia Pty Ltd**

Sydney Head Office  
4 Beaumont Road,  
Mt Kuring-Gai, NSW 2080  
Australia



1800 251 380



[sales@powerbox.com.au](mailto:sales@powerbox.com.au)



[powerbox.com.au](http://powerbox.com.au)

**Powerbox Pacific Ltd**

New Zealand Sales Office  
1a Henry Rose Place,  
Albany, Auckland  
New Zealand 0632



09 4158 320



[sales@powerbox.co.nz](mailto:sales@powerbox.co.nz)



[powerbox.co.nz](http://powerbox.co.nz)