

B2694-23 With R1715

Schaefer AC/DC Battery Charger



For illustrative purposes only

FEATURES

- Queensland Rail Type Approval C0192 - validated for signalling and level crossing applications.
- Natural convection cooling - no fans, reducing potential failure points and increasing long-term reliability.
- High-temperature operation up to 75°C for stable performance in signalling and equipment huts.
- Conformal-coated electronics and reinforced chassis resist humidity, vibration, and contamination common within the rail corridor.
- Supports parallel and redundant operation with active current sharing for load balancing and system redundancy.
- High transient protection, reverse polarity protection, and monitoring via Charger Fail and DC OK relay outputs.
- Eurocassette plug-in design for hot-swappable replacement in the R1715 subrack (supplied separately).

SPECIFICATIONS

INPUT	
Voltage range	115V AC $\pm 20\%$ or 230V AC $+15\%/-20\%$, unit switches off at under and overvoltage
Frequency	50/60Hz
Recommended Input Fuse / MCB	External, 20A time lag / K-characteristic related to fuses manufactured by ABB
No-load Input Power	Approx. 6W
Switch-on Time	300ms typical
Inrush Current	Limiting by thermistor
OUTPUT	
Voltage	54.8V DC (adjustable 48 ... 64V DC)
Current	13A
Recommended Output Fuse	External 16A time lag / B-characteristic related to fuses manufactured by ABB
Line Regulation ($\pm 10\%$)	0.1 %
Load Regulation (10-90%)	< 2% (with external decoupling diode)
Efficiency at Full Load	Approx. 85%
Switching Frequency	Approx. 33 kHz
Ripple	$\leq 1\%$ +30mVp-p
Load Transient (10-90-10%)	6 % typical
Response Time to $\pm 1\%$	2ms typical
Turn-on Rise Time	Softstart, 300ms typical
Overload Protection	Current limited to 70 ... 110 % of full load
Overvoltage Protection	OVP switches off the module at $U_{out} = 70V$ (with automatic return to operation)
Remote Sensing	Sense lines have to be connected to the output or to the load under regard of polarity
Redundant Operation	Via externally installed decoupling diode in R1715 subrack

Parallel Operation	Includes Current Sharing with Interrupt in case of faulty unit in parallel operation
Reverse Polarity Protection	Via anti-parallel diode in the output (output fuse required) installed externally in R1715 subrack.
Transient and Surge Protection	Varistor on Input and Output to meet 2kV transient/surge in accordance with EN61000-4-4 / EN61000-4-5
MECHANICAL	
Mounting Type	Eurocassette via 19" Subrack (R1715). R1715 is pre-configured for 2 x B2694-23 Battery Charger Modules for use in parallel / redundant operation.
Dimensions	- B2694-23 Module: 3U x 42TE x 226mm / 129 x 213 x 226mm (WxHxD) - R1715 Subrack: 3U x 19" x 430.5mm / 132.5 x 482.10 x 430.5mm (WxHxD)
Weight	- B2694-23 Module: 4kg - R1715 Subrack: Approx. 4kg
Increased Mechanical Strength	For shock and vibration in accordance with EN61373
Protection Category	Acc. to IP20
Mounting Instructions	Only in provided position (cooling fin vertical). Above and below the unit at least 40mm distance to neighbouring parts.
ENVIRONMENTAL	
Cooling	Natural Convection
Humidity	Up to 99% RH, non-condensing due to additional Tropical Protection (Conformal Coating) applied to all PCBs.
Temperature Coefficient	0.02 %/°C typical
Operating Temperature	-20°C to +75°C
Internal Temperature	Switch 90°C heatsink temperature for emergency power off
Load Derating	2.5 %/°C from +55°C

B2694-23 with R1715

Schaefer AC/DC Battery Charger

Storage Temperature	-40°C to +85°C
---------------------	----------------

ALARMS / MONITORING

Charger Failure	Indicating with relay
-----------------	-----------------------

DC-OK with Relay (output voltage monitoring)	Switching threshold: $U_{out} > 43.2VDC$
--	--

RELIABILITY

MTBF	Approx. 100.000 h at 40°C (in acc. to MIL-HDBK-217E Notice 1)
------	---

SAFETY & STANDARDS

Safety / Construction	Acc. to EN/IEC 61010-2-201 + EN/IEC 61010-1
-----------------------	---

Earth Leakage	< 3.5mA, acc. to EN/IEC 61010-2-201 + EN/IEC 61010-1
---------------	--

EMC Compatibility	Acc. to EN 61000-6-2 / EN 61000-6-4 / EN61000-4-4 / EN61000-4-5
-------------------	---

Safety Class	1 (equipment with protective earth connection)
--------------	--

Overvoltage Category	II
----------------------	----

Pollution Degree	2
------------------	---

Maximum Installation Altitude	2000m
-------------------------------	-------

Isolation Resistance	> 10 MΩ at 500V DC
----------------------	--------------------


Isolation Test	Acc. to EN/IEC 61010-2-201 + EN/IEC 61010-1
----------------	---

B2694-23 with R1715


Schaefer AC/DC Battery Charger

TECHNICAL DRAWINGS - BATTERY CHARGER


B2694-23-FRONT

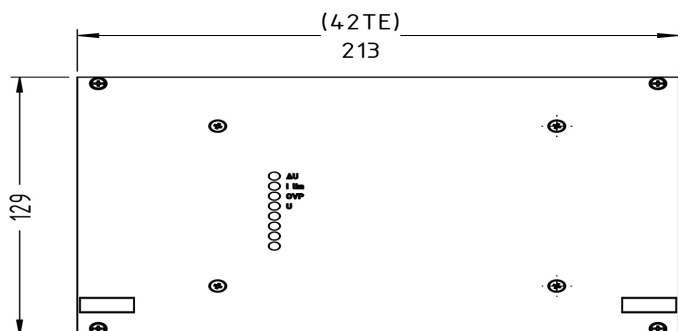


B2694-23-TOP

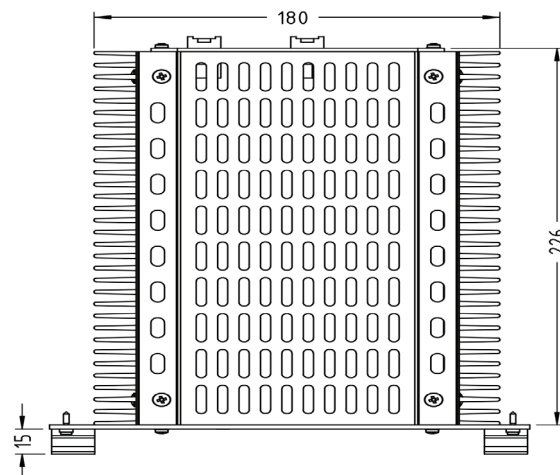


B2694-23-SIDE

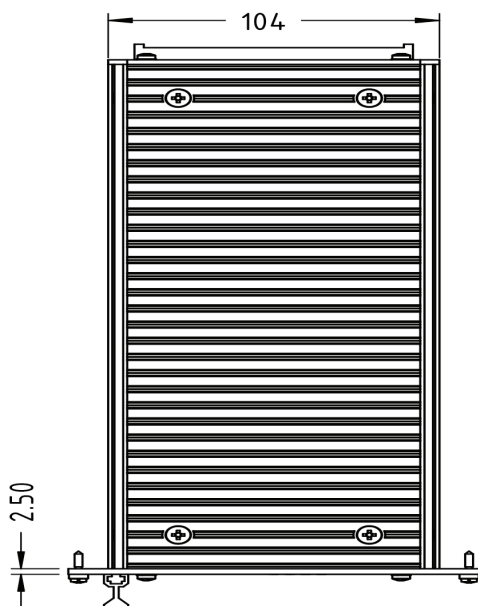

B2694-23-REAR

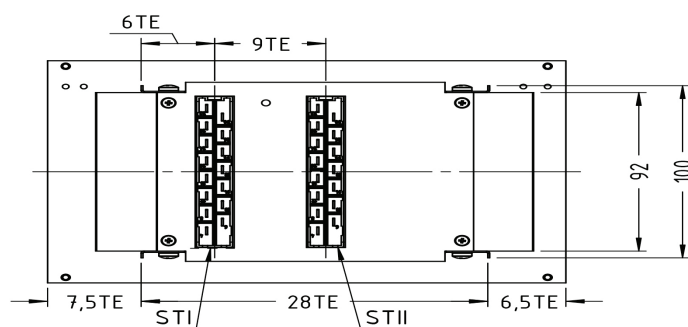

B2694-23-ISOMETRIC

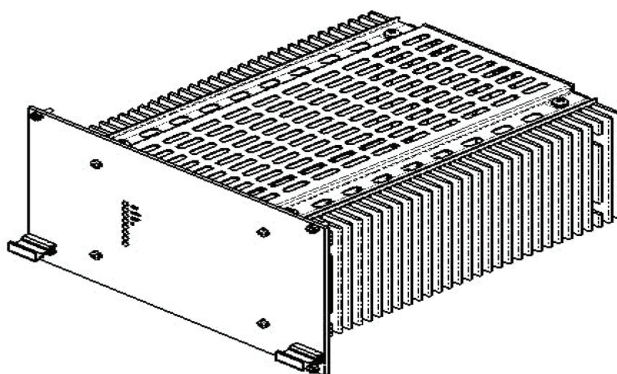

Powerbox Australia Pty Ltd

4 Beaumont Road, Mount Kuring-Gai NSW 2080

p: 1800 251 380 e: sales@powerbox.com.au

powerbox.com.au

Powerbox Pacific

1a Henry Rose Pl, Albany Auckland 0632

p: +64 9 4158 320 e: sales@powerbox.co.nz


powerbox.co.nz

B2694-23 with R1715


Schaefer AC/DC Battery Charger

TECHNICAL DRAWINGS - RACK SYSTEM


R1715-FRONT

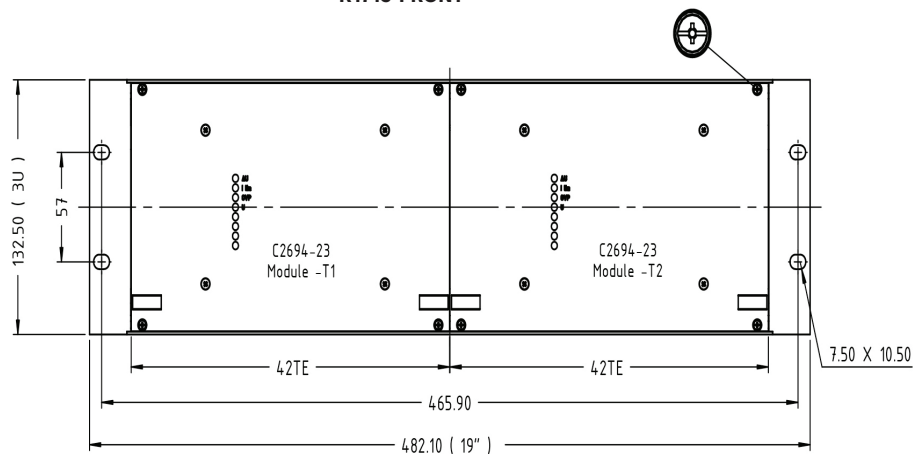


R1715-TOP

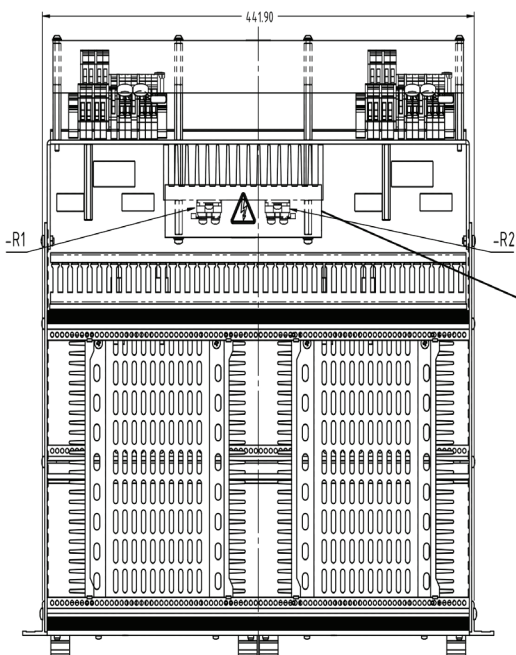

R1715-SIDE

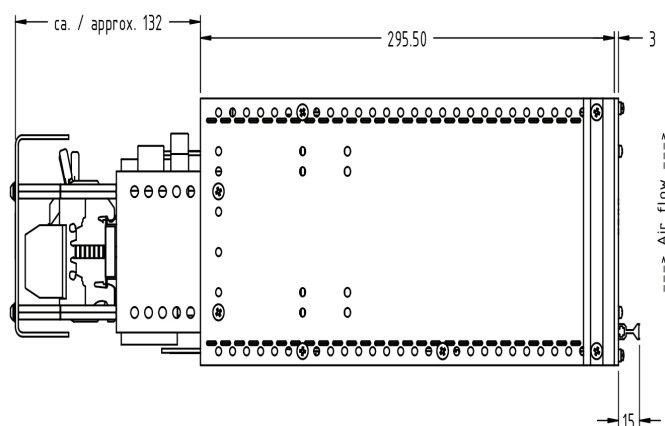

R1715-REAR

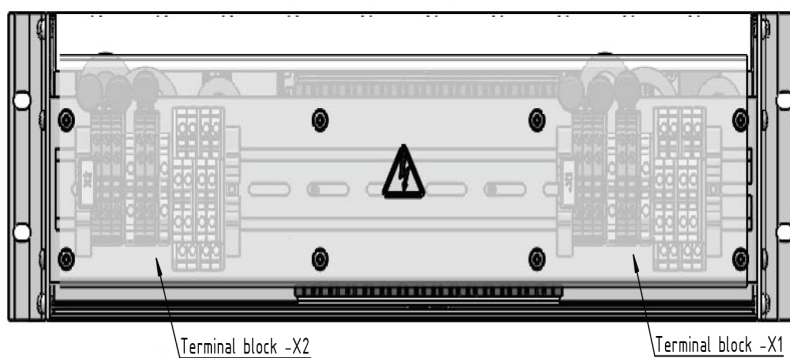

Powerbox Australia Pty Ltd

4 Beaumont Road, Mount Kuring-Gai NSW 2080

p: 1800 251 380 e: sales@powerbox.com.au

powerbox.com.au

Powerbox Pacific

1a Henry Rose Pl, Albany Auckland 0632

p: +64 9 4158 320 e: sales@powerbox.co.nz

powerbox.co.nz